

ROKEE LIGHTING Co., LIMITED

ROKEE Lighting Ind.Park,No.7,Hongyun Road,Longbeiling,Tangxia,Dongguan,Guangdong,China E-mail: office@rokeelighting.com Tel: +86-755-29739398/29676092 Web: www.rokeelighting.com Fax: +86-755-29676092



LED Solar Street Light

SL-01-G2









Better solutions for Led Solar Street Light



IP66 water-proof

Easy Installation



Rotating Solar Panel



190lm/W

Operating Temp.: -20°C ~+50°C

Storage Temp.: -40℃~+80℃

Options |

CCT 3000K **Beam Angle**

Type II-S(140*85°)

4000K 5000K 5700K

Application

Pathway, Parking lot, Garden, Schools, Residential area, Villas, Resorts, Factories, Landscape, Architectural decorative lighting, Village roads and other places.

Specifications

Item SL50W-01-G2 SL90W-01-G2 SL120W-01-G2 SL240W-01-G2 Solar Panel 50W/18V 90W/18V 120W/18V 120W/18V*2 Solar Cell High Efficiency Monocrystalline Silicon Lithium Battery 18AH/12.8V 30AH/12.8V 48AH/12.8V 42AH/25.6V Luminous Efficacy 190Lm/W Lamp Power 30W 50W 80W 100W Led SMD5050 CRI >70 Lens Type II-S(140*85°) Lighting time 5-7 Rainy day(full charged) Weight 12kg(26.5lbs) 17kg(37.5lbs) 24kg(52.9lbs) 40kg(88.2lbs) Pole top diameter Ø50-62mm Mounting height 5~15m Installation space 10~30m	- poomodiiono	II .							
Solar Cell High Efficiency Monocrystalline Silicon Lithium Battery 18AH/12.8V 30AH/12.8V 48AH/12.8V 42AH/25.6V Luminous Efficacy 190Lm/W Lamp Power 30W 50W 80W 100W Led SMD5050 CRI >70 Lens Type II-S(140*85°) Lighting time 5-7 Rainy day(full charged) Weight 12kg(26.5lbs) 17kg(37.5lbs) 24kg(52.9lbs) 40kg(88.2lbs) Pole top diameter Ø50-62mm Mounting height 5~15m	Item	SL50W-01-G2	SL90W-01-G2	SL120W-01-G2	SL240W-01-G2				
Lithium Battery 18AH/12.8V 30AH/12.8V 48AH/12.8V 42AH/25.6V Luminous Efficacy 190Lm/W Lamp Power 30W 50W 80W 100W Led SMD5050 CRI >70 Lens Type II-S(140*85°) Lighting time 5-7 Rainy day(full charged) Weight 12kg(26.5lbs) 17kg(37.5lbs) 24kg(52.9lbs) 40kg(88.2lbs) Pole top diameter Ø50-62mm Mounting height 5~15m	Solar Panel	50W/18V	W/18V 90W/18V 120W/18V						
Luminous Efficacy 190Lm/W Lamp Power 30W 50W 80W 100W Led SMD5050	Solar Cell	High Efficiency Monocrystalline Silicon							
Lamp Power 30W 50W 80W 100W Led SMD5050 SMD5050 CRI >70 SMD5050 SMD5050 </td <td>Lithium Battery</td> <td>18AH/12.8V</td> <td>30AH/12.8V</td> <td colspan="2">42AH/25.6V</td>	Lithium Battery	18AH/12.8V	30AH/12.8V	42AH/25.6V					
Led SMD5050 CRI >70 Lens Type II-S(140*85°) Lighting time 5-7 Rainy day(full charged) Weight 12kg(26.5lbs) 17kg(37.5lbs) 24kg(52.9lbs) 40kg(88.2lbs) Pole top diameter Ø50-62mm Mounting height 5~15m	Luminous Efficacy	190Lm/W							
CRI >70 Lens Type II-S(140*85°) Lighting time 5-7 Rainy day(full charged) Weight 12kg(26.5lbs) 17kg(37.5lbs) 24kg(52.9lbs) 40kg(88.2lbs) Pole top diameter Ø50-62mm Mounting height 5~15m	Lamp Power	30W	50W	80W	100W				
Lens Type II-S(140*85°) Lighting time 5-7 Rainy day(full charged) Weight 12kg(26.5lbs) 17kg(37.5lbs) 24kg(52.9lbs) 40kg(88.2lbs) Pole top diameter Ø50-62mm Mounting height 5~15m	Led	SMD5050							
Lighting time5-7 Rainy day(full charged)Weight12kg(26.5lbs)17kg(37.5lbs)24kg(52.9lbs)40kg(88.2lbs)Pole top diameterØ50-62mmMounting height5~15m	CRI	>70							
Weight 12kg(26.5lbs) 17kg(37.5lbs) 24kg(52.9lbs) 40kg(88.2lbs) Pole top diameter Ø50-62mm Mounting height 5~15m	Lens	Type II-S(140*85°)							
Pole top diameter Ø50-62mm Mounting height 5~15m	Lighting time	5-7 Rainy day(full charged)							
Mounting height 5~15m	Weight	12kg(26.5lbs)	17kg(37.5lbs)	24kg(52.9lbs)	40kg(88.2lbs)				
	Pole top diameter	Ø50-62mm							
Installation space 10~30m	Mounting height	5~15m							
	Installation space	10~30m							

Lighting Modes Options

Option 1:

At night, T1:100%-2hr, T2:60%-2hr, T3: 10%-7hr, T4: 50%-1hr.

For example, when the led solar panel street light turn-on at 6:00 pm,

T1: 100%-2hr on 6:00pm-8:00pm,


T2: 60%-2hr on 8:00pm-10:00pm,

T3: 10%-7hr on 10:00pm-5:00am

T4: 50%-1hr on 5:00am-6:00am.

Remarks: The street lights' turn-on time depends on the clients' local time(Turn-on Light Level: <20lux).

Photometry








Customized modes available.




Dimensions(mm)


LED Solar Street Light




Solar Panel 50W



Solar Panel 90W




Solar Panel 120W






Street light single pole (50W/90W/120W)



Street light Arm pole (50W/90W/120W/240W)

Solar Panel

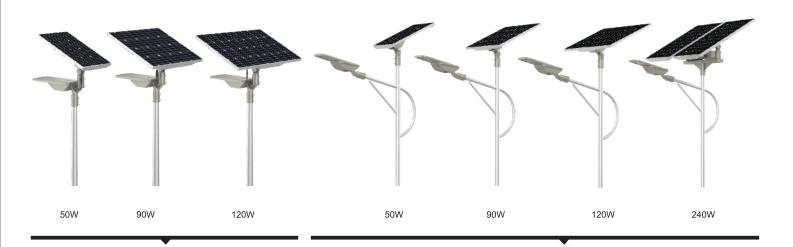





LED Solar Street Light

Installation and use

Street Light Single Pole

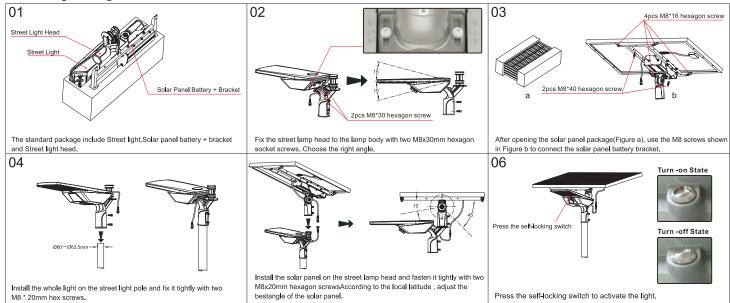

Street light Arm pole

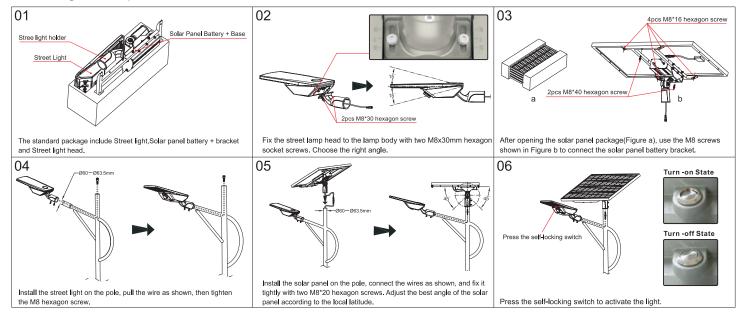

Packing Spec

Item	Вох			Carton		
	Measurement(mm)	Gross weight	Pcs/box	Measurement(mm)	Gross weight	Pcs/box
SL50W-01-G2-P1/P2	Solar Panel: L750*W510*H305	18.0kg(39.7lbs)	5	/	/	1
SL90W-01-G2-P1/P2	Solar Panel: L840*W750*H305	30.0kg(66.1lbs)	5	/	/	1
SL120W/240W-01-G2-P1/P2	Solar Panel: L1105*W750*H290	34.0kg(75.0lbs)	4	/	/	1
SL50W/90W/120W-01-G2-P1/P2	Lamp: L795*W275*H525	18kg(39.7lbs)	1	/	/	1
SL240W-01-G2-P2	Lamp: L1215*W585*H525	38.0kg(83.8lbs)	1	/	/	1